

FALCON 2-60

VACUUM PACKAGING MACHINE



DESCRIPTION

The robust Falcon 2-60 vacuum packaging machine with stainless steel frame is standard equipped with a Busch vacuum pump, an aluminium lid and vacuum chamber and 2 seal bars. This double chamber complies with CE standards.

FEATURES

- Standard with 2 seal bars: 2 x 450mm (front-back),
- Other seal bar configuration available for free: 2x 680mm (left-right)
- Standard double seal (two wires). Optional without extra costs: Cut-off/Wide seal
- Silicon holders easily removable for cleaning and maintenance purposes
- Pump capacity: 63 m³/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 15-40 sec
- Standard Digital control with 10 program memory and Time control
- Comes with insert plates for a faster cycle and product adjustment
- Stainless steel frame
- Aluminium chamber and lid with sight glass

OPTIONS

- 1-2 Cut-off seal
- Bi-active seal
- Soft Air
- Sensor control, Advanced Control System (ACS)
- Liquid control
- Gas flush

ACCESSORIES


- Zebra ZD410 thermal label printer (only in combination with ACS)
- Inclined insert plate (for packing liquids)
- Service kit for standard maintenance

SEAL BAR CONFIGURATION Option Standard H235 mm H235' 680 mm 580 " - 450 " 325 mm Henkelman offers standard 3 year warranty HENKELMAN BV Sales support P +31 73 621 36 71 Titaniumlaan 10 G Ν 5221 CK 's-Hertogenbosch E info@henkelman.com The Netherlands Service/technical support сиим SYSTEM P +31 73 621 36 71 E service@henkelman.com

VACUUM PACKAGING MACHINE FALCON 2-60 - SPECS

DIMENSIONS

In mm

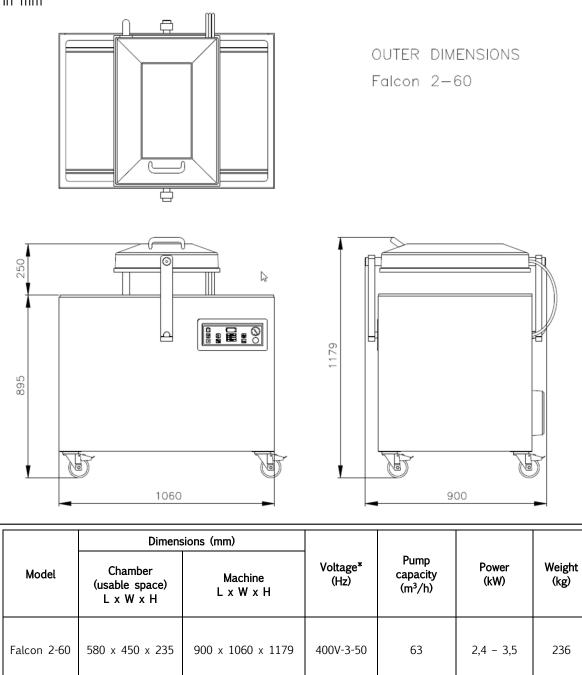

* Other voltages available



HENKELMAN BV Titaniumlaan 10 5221 CK 's-Hertogenbosch The Netherlands

Sales support P +31 73 621 36 71 E info@henkelman.com Service/technical support P +31 73 621 36 71 E service@henkelman.com