

DT 200 A

AUTOMATIC DIPTANK



FEATURES

- Automatic platform with conveyor belt
- Digital temperature control
- Pneumatic movement
- Stainless steel housing
- Optimal hygiene
- Maximum loading capacity: 30 kg
- Machine dimensions: 1170 x 1700 x 1350 mm
- Chamber dimensions: 575x1098x200 mm
- Emersion depth: 200mm
- Dip time: 3-5 seconds
- Cycle time: 22 seconds
- Power: 23 kW
- Voltage: 400V-3-50Hz
- Compressed Air consumption 50l/min 6 bar
- Fully insulated
- Vapor exhaust ø125 mm, equipped with built-in fan
- Water drain 2"
- Automatic water level control
- Built-in lime scale protection

DESCRIPTION

Combined with a vacuum packaging machine, the automatic DT 200 A produces perfect skin packages for an aesthetic presentation. Ideal to create an automatic line. This machine fully complies with CE standards.




Henkelman offers standard 3 year warranty

DIPTANK DT 200 A – SPECS

DIPTANK DT 200 A – SPEC SHEET

DIMENSIONS

In mm

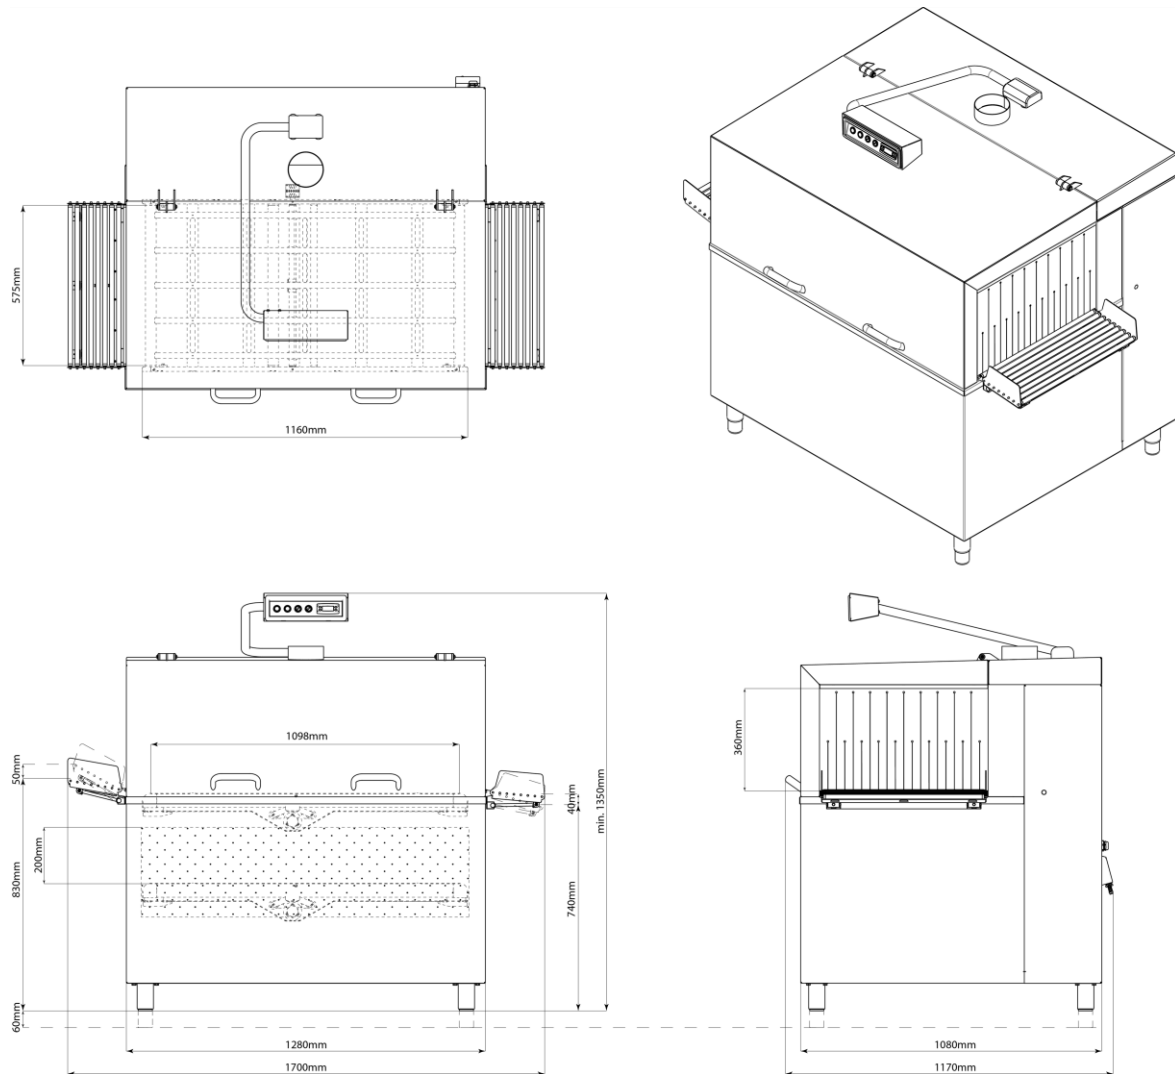

Model	Dimensions (mm)		Voltage *	Power (kW)	Weight (kg)
	Chamber (usable space) WxDxH	Machine WxDxH			
Diptank DT 200 A	575 x 1098 x 200	1170 x 1700 x 1350	400V-3~50Hz	23,0	310 (with water 600)
* Other voltages available					



HENKELMAN BV
Titaniumlaan 10
5221 CK 's-Hertogenbosch
The Netherlands

Sales support
P +31 73 621 36 71
E info@henkelman.com
Service/technical support
P +31 73 621 36 71
E service@henkelman.com